



AT&T Global Network Client 7.02 Setup Instructions

Broadband version

May 2007

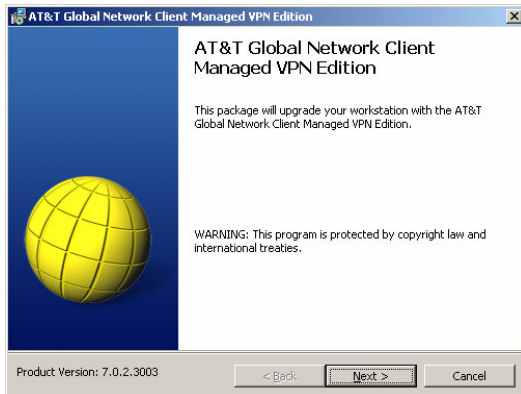


Click: **"Next"**

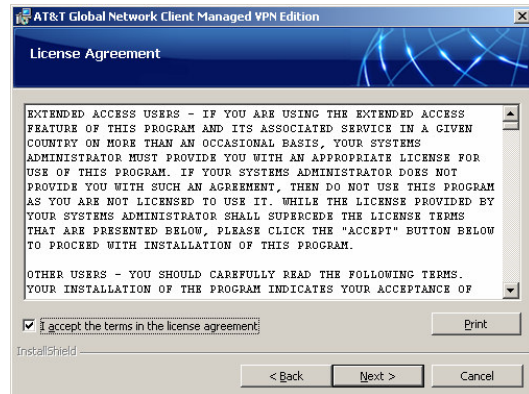


Check: **"I accept the terms in the license agreement"**

Then Click: **"Next"**

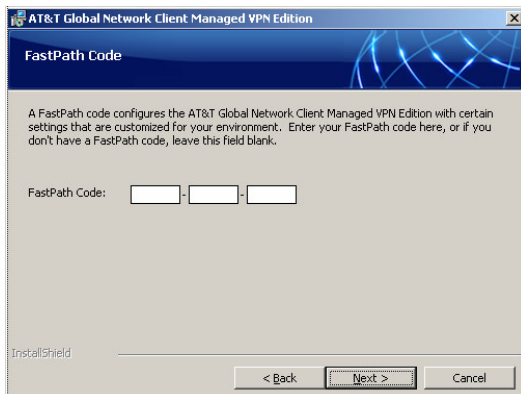


No **"Fastpath Code"** needed


Click: **"Next"**

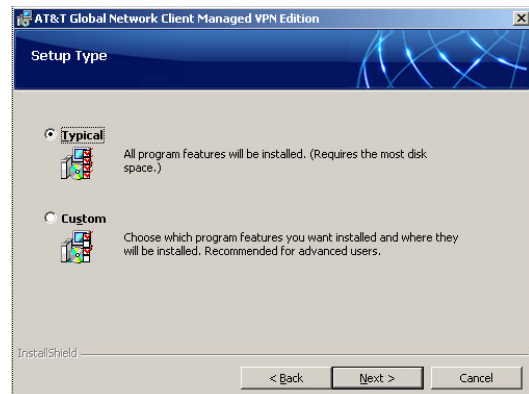


Select: **"Typical"**

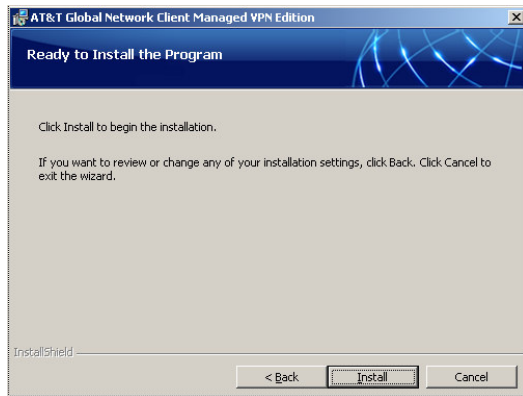

Click: **“Install”**

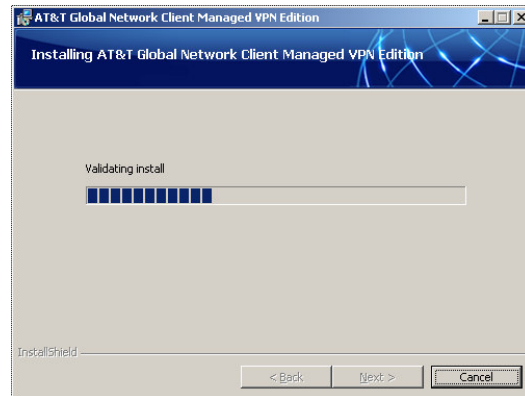

Installation in progress

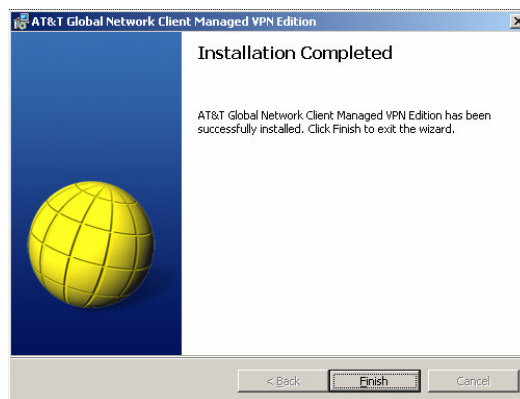


Click: **“Finish”**




AT&T Global Network Client.Ink


On your Desktop you should see an Icon that looks like this
Double left click on this Image



This is an indication that the program is starting

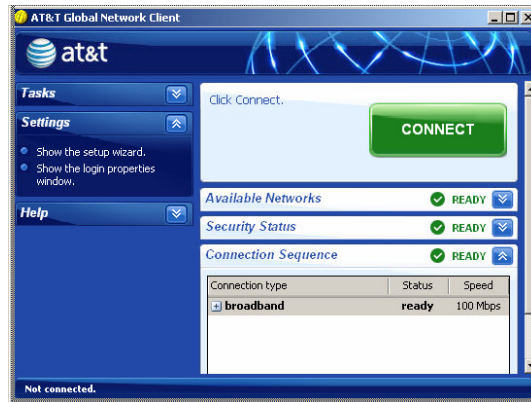


1. Click: the Arrow to the right of “Settings”
2. Click: “Show the setup wizard”

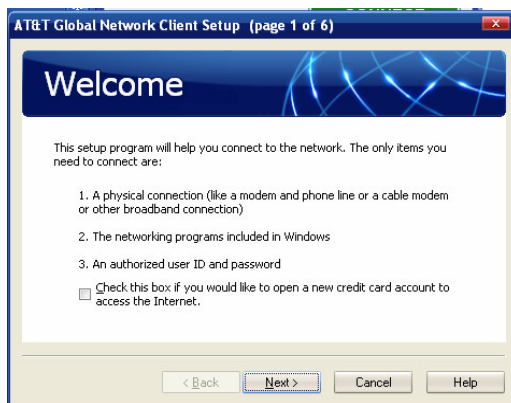


Click "Next" at the Welcome screen




- (1) Type in the Account box **HMDS**
- (2) In the User ID box type the ID **provided to you.**
- (3) Click on “Advanced Login Properties”

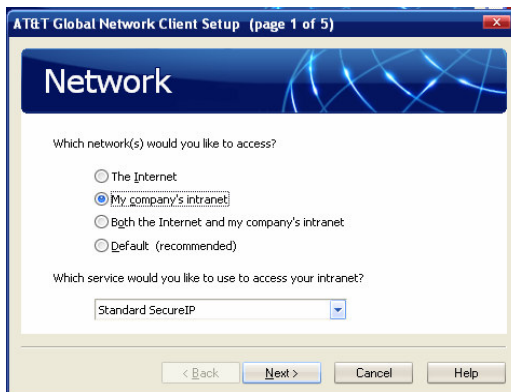


Select “My company’s intranet” and click ‘Next’

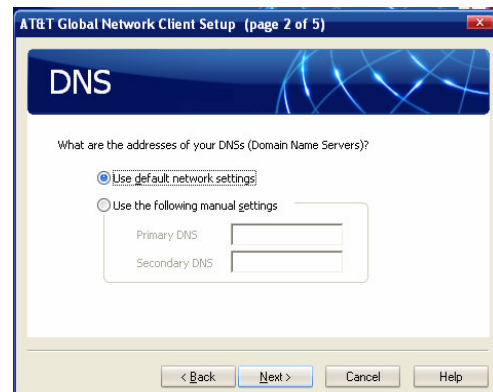


Click “Next”

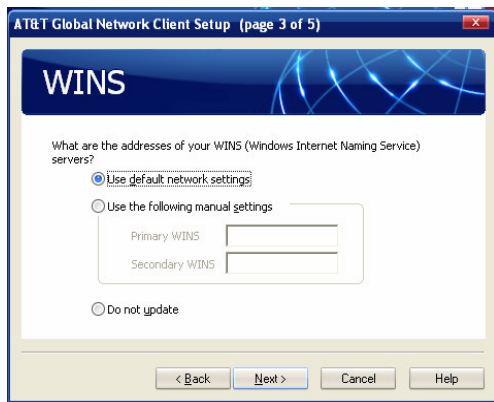

Click “Next”

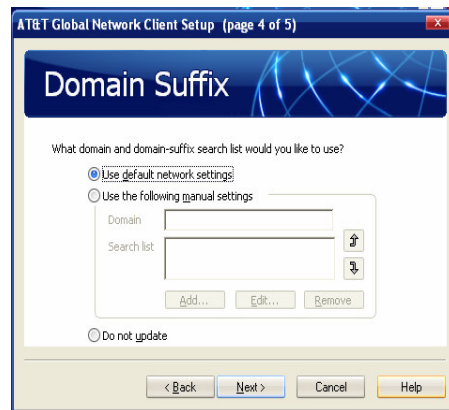


Click “Next”

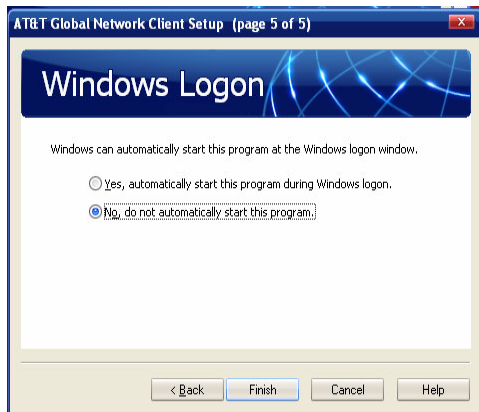


Select “No do not automatically start the program”
Click “Finish” at the Windows Logon’ screen



Click “Next” (Account and ID will be filled in already)

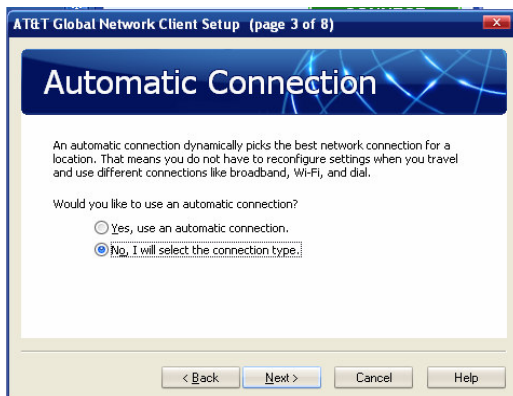


Click: “Next”

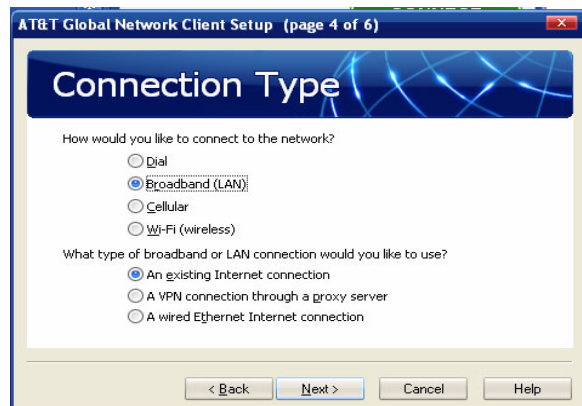


For Broadband Users Select: “Broadband (LAN)”
And “An existing internet connection” For Dial-Up
Users Select: **Dial** and **Regular** and continue to page
6

Continued Broadband setup from page 4

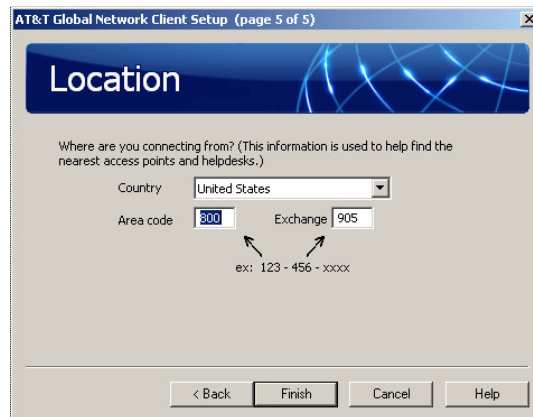

Enter your **“Area Code”** Enter
Enter your **“Exchange”** Your Exchange is the first 3 digits of your phone number after your Area code
Then Click: **“Finish”**

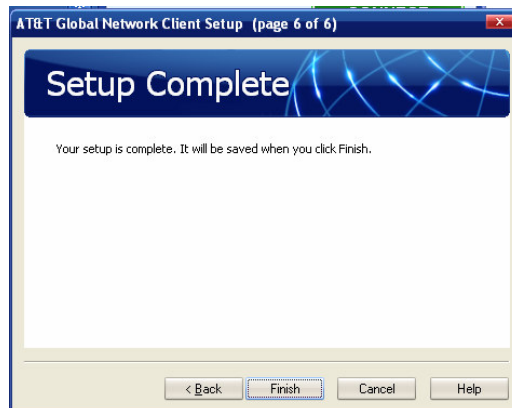

Click: **“Finish”**

Continue to page 7 to configure the Autostart feature

Continued Dial setup from page 4

Modem

Which modem would you like to use?

[Dropdown menu]

Add modem... Modem properties...

☒ Wait for dial tone before dialing.
☐ Use Pulse mode dialing.

< Back Next > Cancel Help

Your Modem should be listed in the box labeled
“Which modem would you like to use?”

If there is no modem list in the box you will need to
 contact your Computer Technician

Location

Where are you connecting from? (This information is used to help find the nearest access points and helpdesks.)

Country: United States

Area code: 800 Exchange: 905

ex: 123 - 456 - xxxx

☐ Use international dialing to call a phone number in another country.

< Back Next > Cancel Help

Enter your **“Area Code”**
 Enter your **“Exchange”** Your Exchange is the first 3
 digits of your phone number after your Area code

Then Click: **“Next”**

Dial Access Points

Select a number to dial. (Click Back to change where you are calling from).

United States > 800-905-xxxx > [all access points]

City	Number	Call Type	Distance	M...
<input checked="" type="checkbox"/> Ketchikan	907-247-2715	long distance		v.90
<input type="checkbox"/> Mobile	251-509-0005	long distance		v.92
<input type="checkbox"/> Lafayette	334-219-4163	long distance		v.90
<input type="checkbox"/> Tuscaloosa	205-409-0521	long distance		v.90
<input type="checkbox"/> Thomasville	334-830-4184	long distance		v.90
<input type="checkbox"/> Heber Springs	501-429-4105	long distance		v.90

Dial prefix: [Dropdown] Number to dial: 1-907-247-2715 Properties...

< Back Next > Cancel Help

Select a local number to you

Setup Complete

Your setup is complete. It will be saved when you click Finish.

Windows can automatically start this program whenever a network connection is needed.

☐ Yes, start this program when needed.
☒ No, do not start this program automatically.

< Back Finish Cancel Help

Select **“No, do not start this program automatically”**
 Click **“Finish”**

at&t

Tasks: Click Connect. [CONNECT button]

Settings: Show the setup wizard. Show the login properties window.

Help

Available Networks: READY

Security Status: READY



Connection Sequence: READY

Connection type	Status	Speed
broadband	ready	100 Mbps

Not connected.


The AT&T client can be loaded from the Desktop icon.

➡ To Autostart your browser click: **Settings** then **“Show the login properties window”**

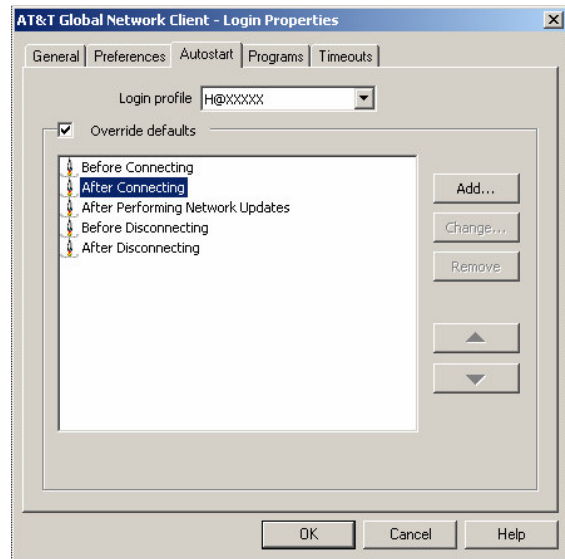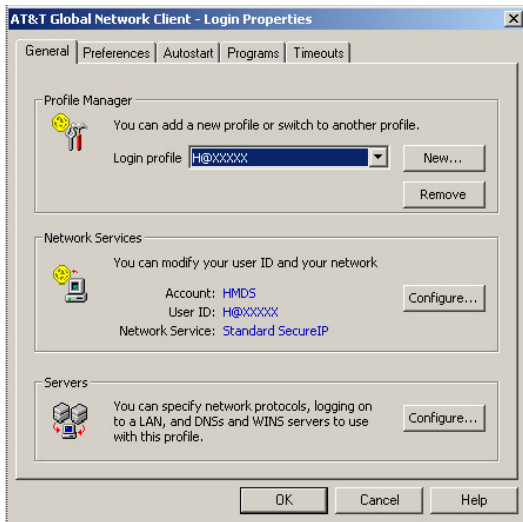


Select: **“Autostart”** tab at the top

Check: **“Override defaults**, highlight **“After Connecting”** then
Click: **“Add”** on the right.

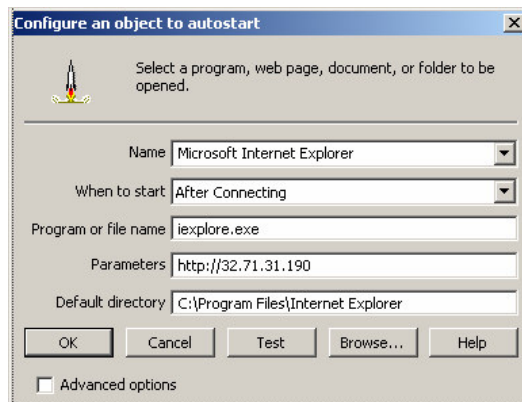

In the **Name** box click the drop down arrow on the right and **Select: Microsoft Internet Explorer**

In the **Parameters** box Enter the IP address
http://32.77.214.238 for LA. Then **Click: OK**
Then **Click: OK**

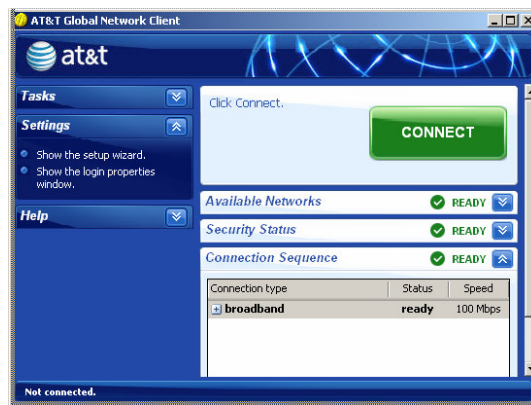

Click: “Connect”



Your **Account** and **User ID** should already be entered
Enter your password and click **OK**



Once you see this screen you are connected to the AT&T network and your State page will autostart.



